




ORDERING FORM / RESISTANCE THERMOMETER TYPE DW

Type DW

Dimension/Thermowell/mm

L	U	G	N	F2	F3	d1	M
110	65	105	M14×1.5	18	9.0	3.5	155
110	73	105	M14×1.5	18	9.0	3.5	155
140	65	135	M14×1.5	18	9.0	3.5	165
200	65	195	M14×1.5	18	9.0	3.5	165
200	125	195	M14×1.5	18	9.0	3.5	165
260	125	255	M14×1.5	18	9.0	3.5	165
110	65	105	M18×1.5	24	12.5	7	155
110	73	105	M18×1.5	24	12.5	7	155
140	65	135	M18×1.5	24	12.5	7	165
170	133	165	M18×1.5	24	12.5	7	165
200	125	195	M18×1.5	24	12.5	7	165
200	65	195	M18×1.5	24	12.5	7	165
260	125	255	M18×1.5	24	12.5	7	165
410	275	405	M18×1.5	24	12.5	7	165
110	65	105	1/2"BSP	26	12.5	7	155
110	73	105	1/2"BSP	26	12.5	7	155
140	65	135	1/2"BSP	26	12.5	7	165
200	65	195	1/2"BSP	26	12.5	7	165
200	125	195	1/2"BSP	26	12.5	7	165
260	125	255	1/2"BSP	26	12.5	7	165
410	275	405	1/2"BSP	26	12.5	7	165

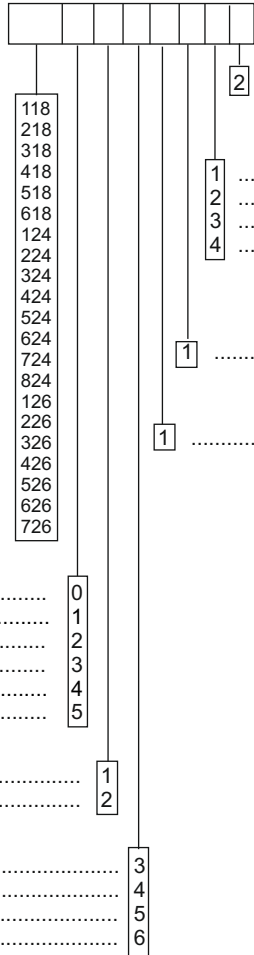

- V1.0
- Temperature Range
 - 2 -50 / +600 °C
- Tolerance class/DIN
 - 1 Cl. A : ±0.15 °C
 - 2 Cl. B : ±0.3 °C
 - 3 1/3 DIN : ±0.1 °C
 - 4 1/6 DIN : ±0.05 °C
- Resistance in Ohm at 0°C
 - 1 100
- Number of elements
 - 1 1×Pt

Material/Thermowell

- Without thermowell 0
- W.no. 1.4571 (AISI 316Ti) 1
- W.no. 1.5415 (16Mo3) 2
- W.no. 1.7335 (13CrMo4-5) 3
- "W.no. 1.7380 (10CrMo9-10) 4
- W.no. 1.4961 (X8CrNiNb1613) 5


Connection Head

- Standard B-head 1
- Stainless steel head 2

Number of conductors

- 3 cond. 3
- 4 cond. 4
- Prepared f. 3-wire transmitter 5
- Prepared f. 4-wire transmitter 6

Connection diagram:

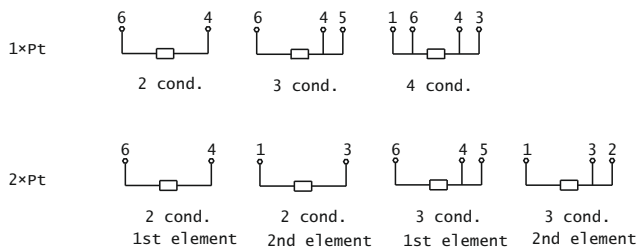

Head office:

Senmatic A/S
 Industrivej 8, 5471 Sønderød, Denmark
 Phone: +45 64 89 22 11
 dk@senmatic.com - www.senmatic.com